



Model A AUTOMATIC SPRINKLER (Close Type) P01, U01 and T01 (Glass Bulb Type)

The PROTECTOR sprinkler is available in several styles, finishes, temperature ratings and 1/2" orifice size to meet varying design requirements.

Approved by Malaysia Fire and Rescue Department (BOMBA)

Pendent Sprinkler



Upright Sprinkler



Conventional Sprinkler




Specifications

Model	P01	U01	T01
Installation direction	Downward	Upward	Conventional
Discharge capacities	80 ℓ /min at 1.0 kgf/cm ²		
Tested pressure	35 kgf/cm ² - 5 min		

SURFACE FINISH AVAILABLE ON SPECIAL ORDER

Discharge Capacities Performance Curve Chart

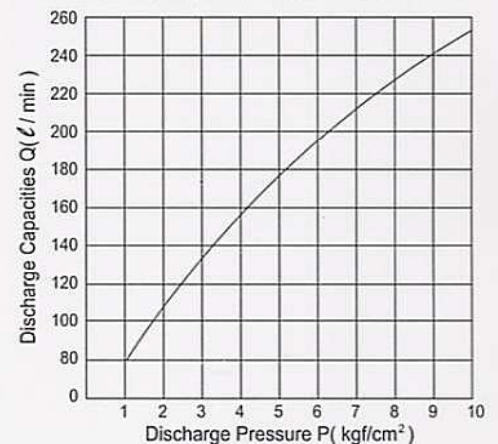

Temperature ratings	Bulb Color	N. F. P. A Maximum Ceiling temp.
135°F / 57°C 155°F / 68°C	Orange Red	100°F / 38°C
175°F / 79°C 200°F / 93°C	Yellow Green	150°F / 66°C
286°F / 141°C	Blue	225°F / 107°C
360°F / 182°C	Mauve	300°F / 149°C

MATERIALS

Frame : Brass/Chrome

Deflector : Brass/Chrome

Bulb-Glass :
Glycerin Solution Nominal 5mm Diameter.

Bushing : Brass

Seal : Teflon * Tape