

DOMES ALARM BELLS





DESCRIPTION

DEMCO Dome Alarm Bells are professionally designed to meet the needs of fire fighting and detection system with central control equipment. The simplicity of the design incorporates fewer working parts, easy installation and high level of efficiency capable for operating under most adverse conditions. DEMCO Alarm Bells are designed to meet the requirement of EN54-3:2001

DEMCO ADVANTAGES

- Well proven high reliability.
- Interchangeable base.
- Wide operating Voltage range.
- Zero standby current.
- Low current consumption.
- Loud and clear ringing tone.
- Universal Application available in three DC Voltages range from 6V, 12V and 24V. AC Voltages in 110V and 240V for use with most alarm systems.

DECIBEL LEVELS

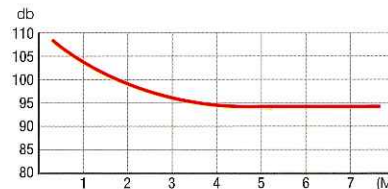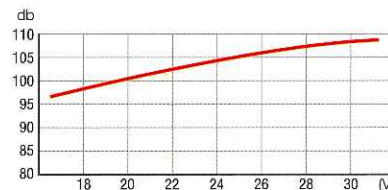

Model D-102



Model D-102 is very suitable for Surface or Semi-Conceal fixing which in this case the base of bell can be sunk into wall using a junction box so that the edge of the bell is only 12mm from the wall surface.


DECIBEL RATINGS/SPECIFICATION

AC TYPE		DECIBEL RATING @ 1M (3Ft)		
Voltage	Amps	100mm (4")	150mm (6")	200mm (8")
110	.015	92 dB	95 dB	97 dB
240	.033	98 dB	105 dB	106 dB
DC TYPE		DECIBEL RATING @ 1M (3Ft)		
Voltage	Amps	100mm (4")	150mm (6")	200mm (8")
12	.08	95 dB	99 dB	100 dB
24	.05	96 dB	103 dB	105 dB
Net/Gross Weight		626/668 g	888/966 g	1296/1445 g

SIRIM TEST REPORT (2008EL0626)

Specifications are subject to change without prior notice.

Front View of Universal Base for 6" and 8" bells



MOUNTING INSTRUCTION

The bell must be mounted with its striker pointing downward.



Lot 3928, Jalan Keretapi Lama
Off Jalan Kapar 5 1/2 Miles
42100 Klang
Selangor Darul Ehsan
West Malaysia
Tel: +603-3290 3333
Fax: +603-3290 2288
E-mail: sales@demcoalarm.com

